


Attachement:
Bolts Ø0.625 Grade 8 / Plated



MAIN CHORDS Ø2.0 x 0.125				<u>SIZES</u>	MAIN CHORDS Ø1.9 x 0.145			
WEIGHT	ITEMS REFERENCES			Length	ITEMS REFERENCES			WEIGHT
Lbs (kg)								Lbs (kg)
38 (17)	TIT- 1616 -048	P.2_125		<- 48" ->	TIT- 1616 -048	P.9_145		38 (17)
42 (19)	TIT- 1616 -060	P.2_125		<- 60" ->	TIT- 1616 -060	P.9_145		42 (19)
58 (26)	TIT- 1616 -096	P.2_125		<- 96" ->	TIT- 1616 -096	P.9_145		58 (26)
70 (32)	TIT- 1616 -120	P.2_125		<- 120" ->	TIT- 1616 -120	P.9_145		70 (32)



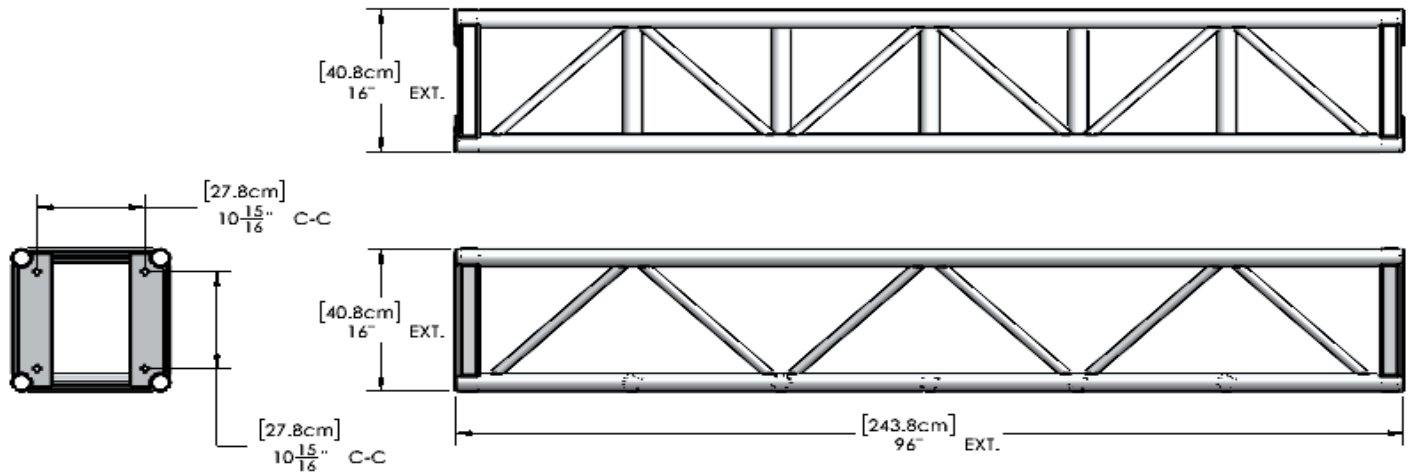

Other sizes also available in 24" / 36" / 72" / 84"

Material: Truss & Plates: 6061-T6 / Bolts : Ø0.625 Grade 8

ALL OUR TRUSSES ARE MANUFACTURED BY CERTIFIED WELDERS



ALLOWABLE LOAD TABLE :

Span length ft (m)	Uniformly Distributed Load				Center point				Third point				Quarter point			
																
	Load Capacity		Deflection		Load Capacity		Deflection		Load Capacity		Deflection		Load Capacity		Deflection	
lb/ft (kg/m)	lb (kg)	in (mm)	lb (kg)	in (mm)	lb (kg)	in (mm)	lb (kg)	in (mm)	lb (kg)	in (mm)	lb (kg)	in (mm)	lb (kg)	in (mm)		
8 (2.44)	388 (577)	3101 (1406)	0.02 (0.6)	3123 (1417)	0.04 (1)	1563 (709)	0.03 (0.8)	1042 (473)	0.03 (0.8)							
10 (3.05)	319 (475)	3189 (1446)	0.05 (1.2)	3218 (1460)	0.08 (2)	1611 (731)	0.07 (1.7)	1074 (487)	0.06 (1.6)							
16 (4.88)	190 (283)	3041 (1379)	0.19 (4.9)	2953 (1340)	0.29 (7.5)	1550 (703)	0.26 (6.7)	1033 (469)	0.25 (6.3)							
20 (6.1)	155 (230)	3097 (1405)	0.39 (9.8)	2336 (1060)	0.46 (11.7)	1588 (720)	0.53 (13.5)	1059 (480)	0.50 (12.6)							
24 (7.32)	122 (182)	2940 (1334)	0.64 (16.3)	1920 (871)	0.67 (17)	1440 (653)	0.84 (21.4)	960 (436)	0.79 (20)							
30 (9.14)	97 (145)	2923 (1326)	1.26 (32)	1497 (679)	1.05 (26.6)	1123 (509)	1.32 (33.4)	748 (339)	1.23 (31.2)							
32 (9.75)	87 (129)	2778 (1260)	1.47 (37.3)	1389 (630)	1.20 (30.4)	1042 (473)	1.50 (38)	695 (315)	1.40 (35.5)							
40 (12.19)	53 (79)	2118 (961)	2.29 (58.2)	1059 (480)	1.89 (48)	794 (360)	2.34 (59.4)	530 (240)	2.19 (55.7)							
48 (14.63)	35 (51)	1658 (752)	3.30 (83.9)	829 (376)	2.76 (70)	622 (282)	3.36 (85.4)	415 (188)	3.16 (80.4)							
50 (15.24)	31 (47)	1563 (709)	3.58 (91)	782 (355)	3.00 (76.2)	586 (266)	3.65 (92.6)	391 (177)	3.44 (87.3)							

Load per applied point

NOTES :

- Capacities shown in this table are valid for structures manufactured after January 2020.
- Trusses must be loaded uniformly on both sides of their longitudinal axis.
- Loads must be applied to or as close as possible to the nodes of the trusses.
- Deflection of truss is theoretical and based solely on their rigidity.
It therefore does not take into account of the possible movement between the truss sections due to the tolerance of the pins/bolts.
- Datas are valid for indoor use only.
- Trusses are hung from the top chord only.
- Data are valid only for static loads and span, with two support points (one at each end).
If dynamic loads or more attachment points are needed, **contact Therio Innovation.**