

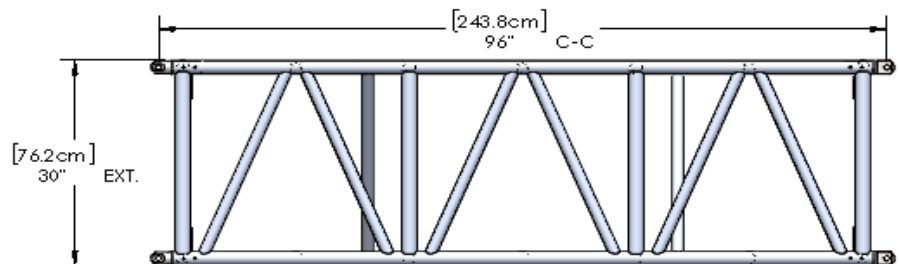


MAIN CHORDS OFFERED

ØEXT. 2.0" x 0.188" → REF. .2_188
ØEXT. 1.9" x 0.200" → REF. .9_200



2020-06-15

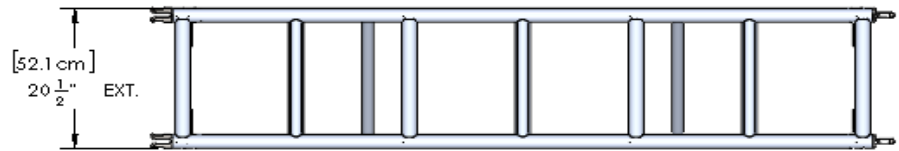

SIZES

MAIN CORD ØEXT. 2.0" x 0.188"

MAIN CORD ØEXT. 1.9" x 0.200"

WEIGHT Lbs (kg)	ITEMS REFERENCES	Length	ITEMS REFERENCES	WEIGHT Lbs (kg)
73 (33)	TIE- 3020 - 48 F.2_188	← 48" →	TIE- 3020 - 48 F.9_200	73 (33)
90 (41)	TIE- 3020 - 60 F.2_188	← 60" →	TIE- 3020 - 60 F.9_200	90 (41)
125 (57)	TIE- 3020 - 96 F.2_188	← 96" →	TIE- 3020 - 96 F.9_200	125 (57)
136 (62)	TIE- 3020 - 120 F.2_188	← 120" →	TIE- 3020 - 120 F.9_200	136 (62)

Other sizes also available in 24" / 36" / 72" / 84"

MATERIAL Truss: extruded aluminum 6061-T6 / Spigots: C12L14 steel / Pin: 1144 Stressproof

ALL OUR TRUSSES ARE MANUFACTURED BY CERTIFIED WELDERS

Tel : 514-400-3336

info@therioinnovation.com



ALLOWABLE LOAD TABLE :

Span length	Uniformly Distributed Load				Center point		Third point				Quarter point			
	Load Capacity		Deflection		Load Capacity	Deflection	Load Capacity		Deflection		Load Capacity		Deflection	
ft (m)	lb/ft (kg/m)	lb (kg)	in (mm)	in (mm)	lb (kg)	in (mm)	lb (kg)	in (mm)	in (mm)	lb (kg)	in (mm)	lb (kg)	in (mm)	
8 (2.44)	1592 (2368)	12732 (5775)	0.02 (0.4)		12732 (5775)	0.03 (0.7)	6382 (2895)	0.02 (0.6)		4254 (1930)	0.02 (0.6)			
10 (3.05)	1176 (1749)	11755 (5332)	0.03 (0.8)		11755 (5332)	0.05 (1.3)	5900 (2676)	0.04 (1.1)		3933 (1784)	0.04 (1)			
16 (4.88)	778 (1158)	12454 (5649)	0.14 (3.4)		8365 (3794)	0.15 (3.7)	6274 (2846)	0.19 (4.7)		4182 (1897)	0.17 (4.4)			
20 (6.1)	568 (845)	11356 (5151)	0.24 (6.2)		6635 (3010)	0.23 (5.8)	4977 (2257)	0.29 (7.3)		3318 (1505)	0.27 (6.8)			
24 (7.32)	456 (679)	10944 (4964)	0.41 (10.4)		5472 (2482)	0.33 (8.3)	4104 (1862)	0.42 (10.6)		2736 (1241)	0.39 (9.9)			
30 (9.14)	286 (426)	8587 (3895)	0.64 (16.2)		4293 (1947)	0.52 (13.1)	3220 (1461)	0.65 (16.5)		2147 (974)	0.61 (15.4)			
32 (9.75)	250 (372)	7989 (3624)	0.72 (18.4)		3995 (1812)	0.59 (14.9)	2996 (1359)	0.74 (18.8)		1997 (906)	0.69 (17.5)			
40 (12.19)	154 (229)	6166 (2797)	1.13 (28.8)		3083 (1398)	0.93 (23.5)	2312 (1049)	1.15 (29.3)		1542 (699)	1.08 (27.4)			
48 (14.63)	102 (152)	4909 (2227)	1.63 (41.4)		2455 (1113)	1.35 (34.2)	1841 (835)	1.66 (42.2)		1227 (557)	1.56 (39.6)			
50 (15.24)	93 (138)	4651 (2110)	1.77 (44.9)		2326 (1055)	1.47 (37.2)	1744 (791)	1.80 (45.8)		1163 (527)	1.69 (43)			

Load per applied point

NOTES :

- Capacities shown in this table are valid for structures manufactured after January 2020.
- Trusses must be loaded uniformly on both sides of their longitudinal axis.
- Loads must be applied to or as close as possible to the nodes of the trusses.
- Deflection of truss is theoretical and based solely on their rigidity.
It therefore does not take into account of the possible movement between the truss sections due to the tolerance of the pins.
- Datas are valid for indoor use only.
- Trusses are hung from the top chord only.
- Data are valid only for static loads and span, with two support points (one at each end).
If dynamic loads or more attachment points are needed, contact Therio Innovation.

